E1 SERIES
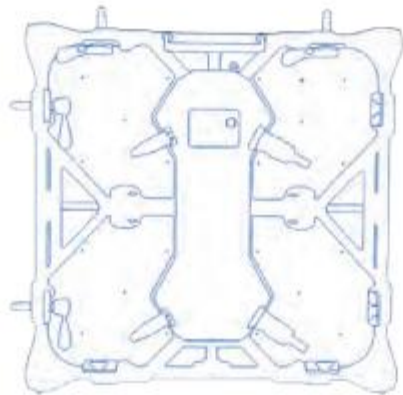## INTRODUCTION

UNIVIEW

CHANGE FOR BETTER

UNIVIEW | E1 Series

EI features

Joint bolt lock

LCD Indicator

Power Input/Output

Cabinet Handle

Module Handle

Signal output/Input

Left right lock   curve lock
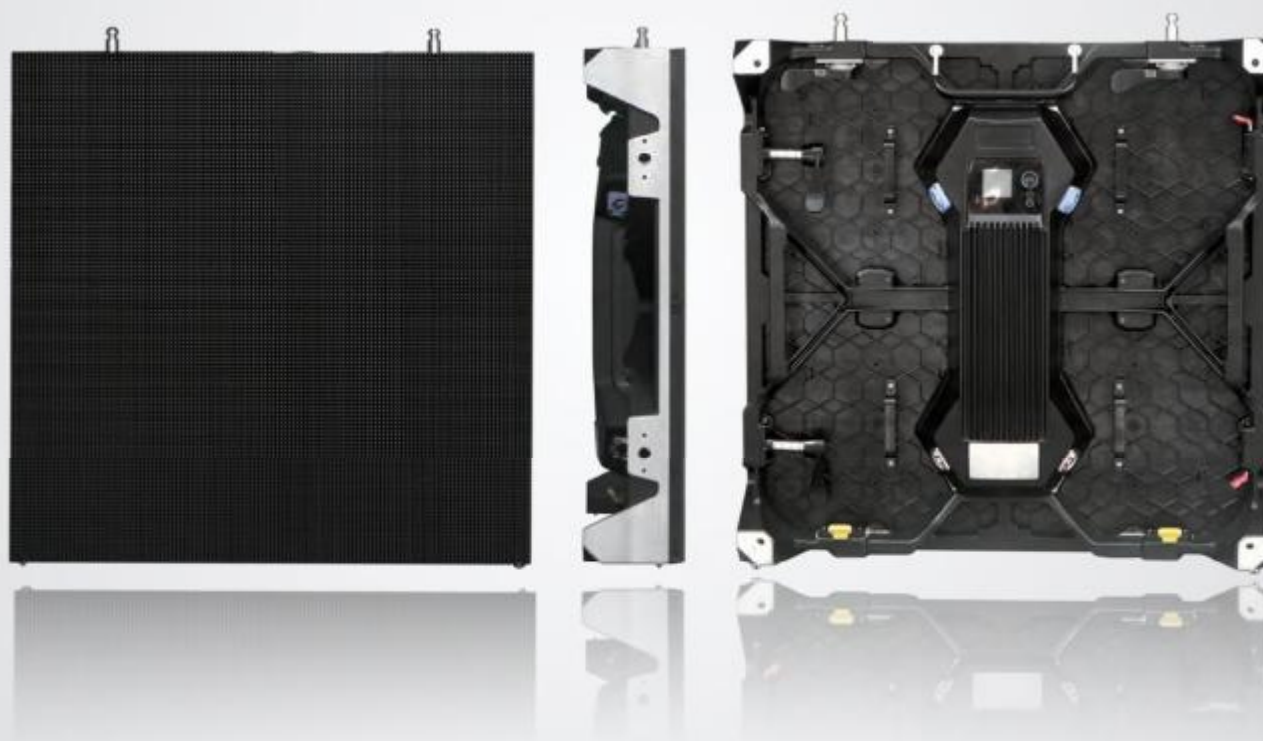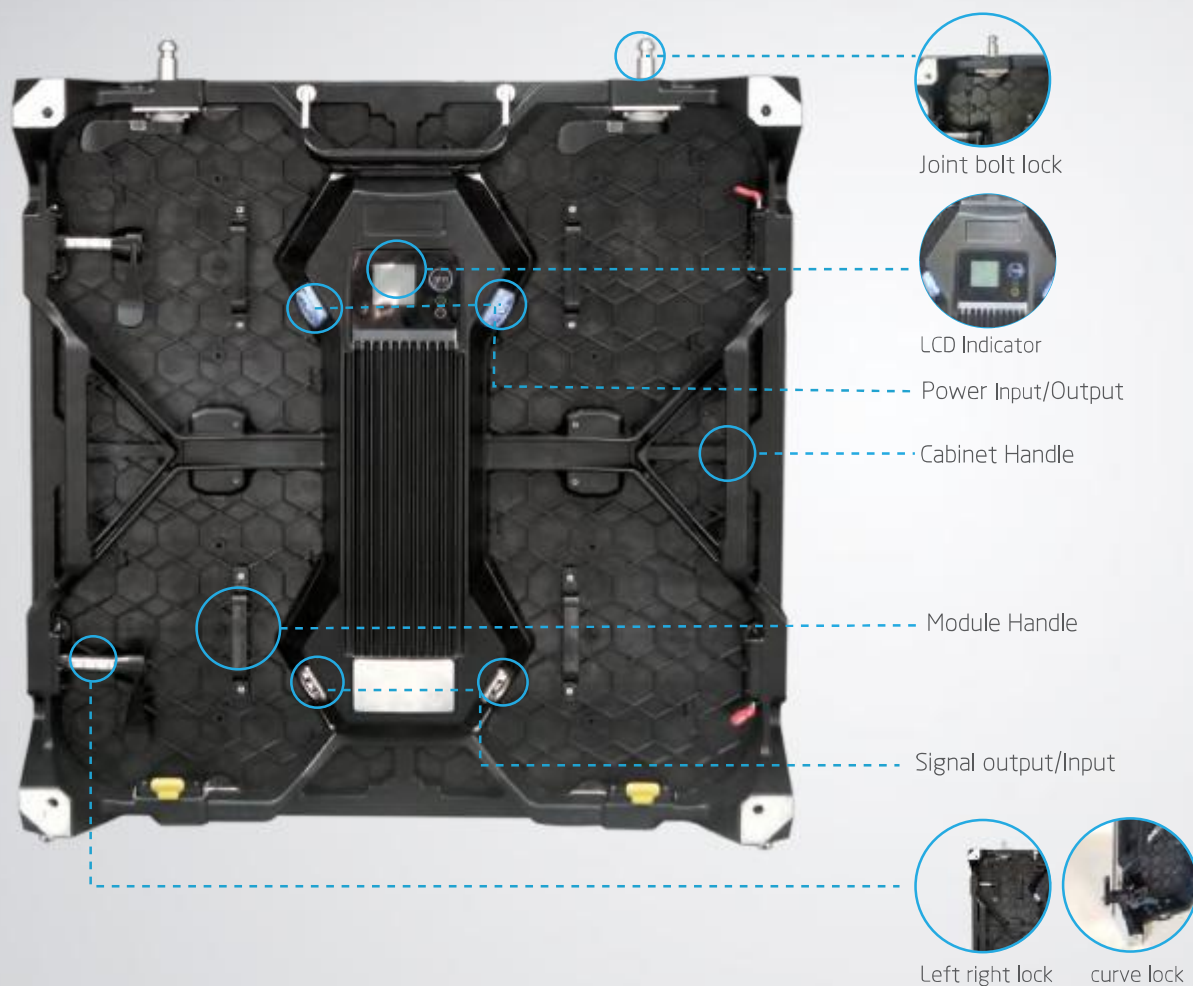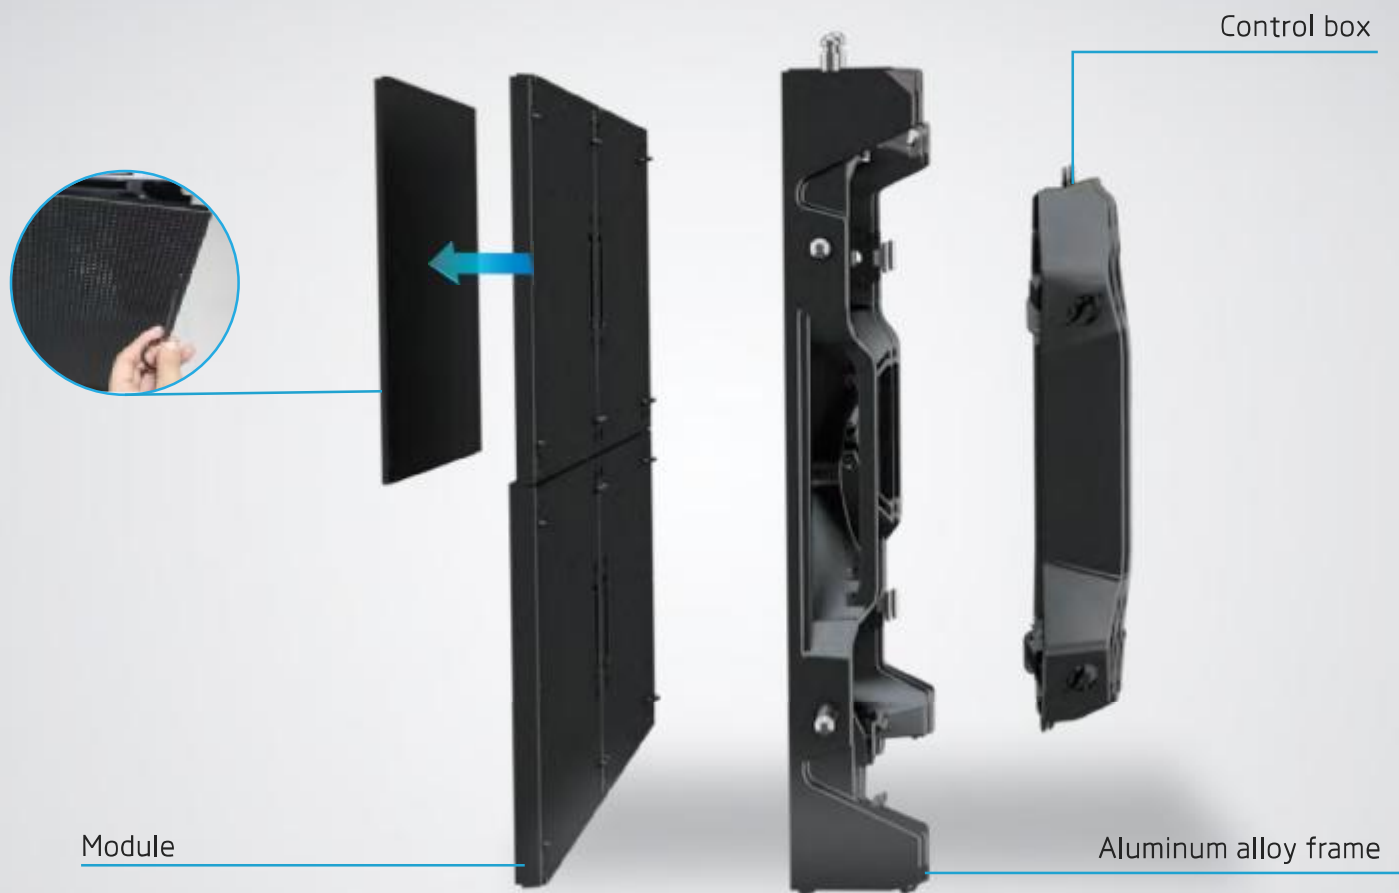
❶ Thin and light shape(8kg/pcs)

❷ High definition & IP with 24h display

❸ front & rear maintenance

❹ Noiseless and Fanless design for heat dissipation

❺ One-person install & dismantle design and tool-less

❻ Applicable for Indoor Concert,TV station, studio and commercial centers etc

❼ Vertical installation is available, one hanging bar could be hanged 24pcs cabinets.
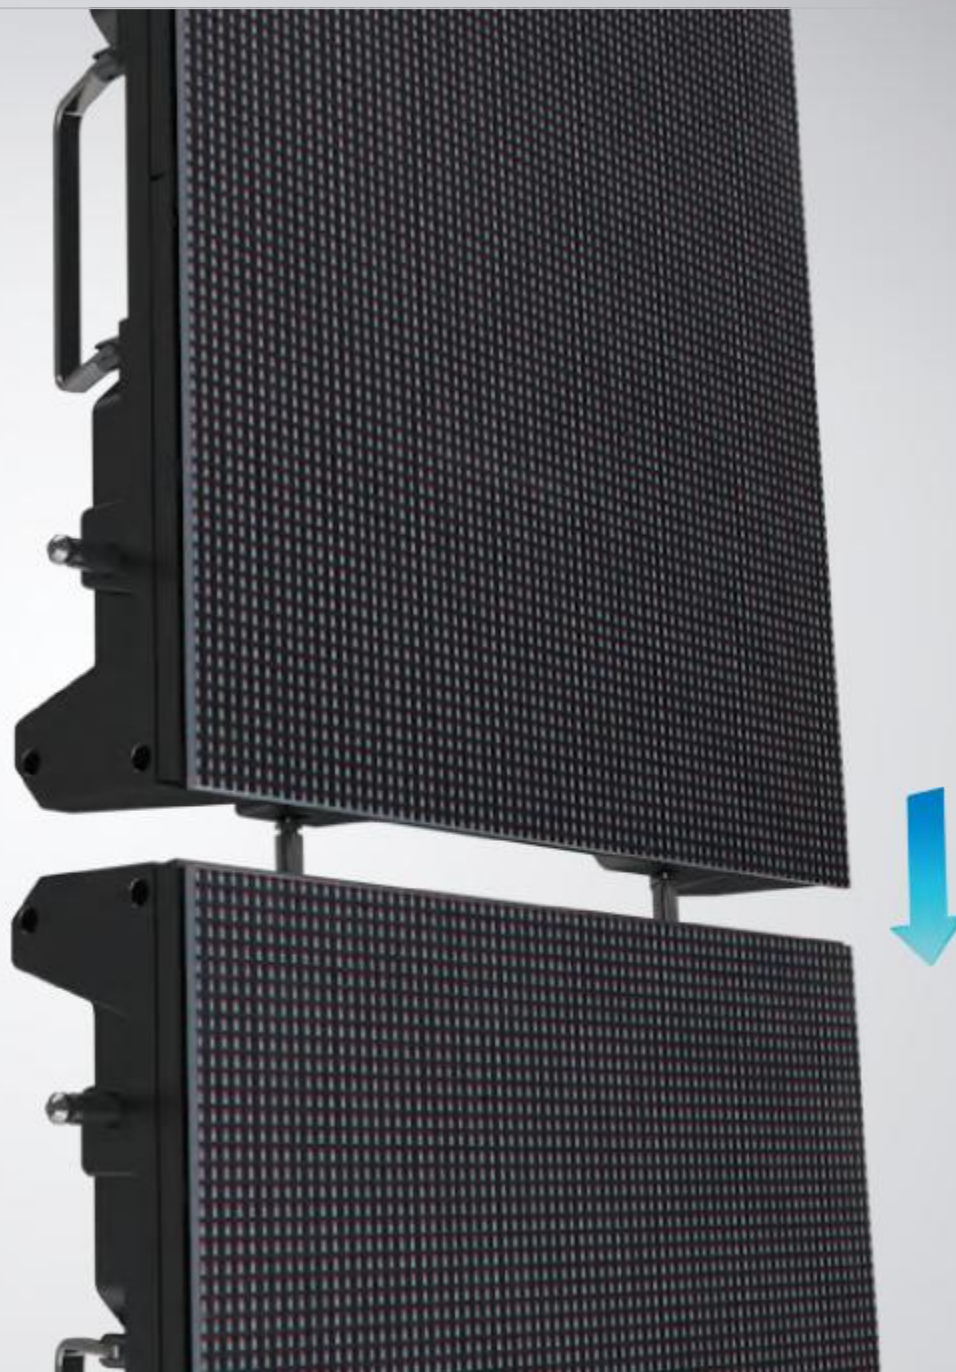
❽ Can be replaced with Curve Lock

Inner/outer ± 7.5°
available form different DIY shape

maximum outer
curved angle +7.5°

flat 0°

maximum inner
curved angle -7.5°
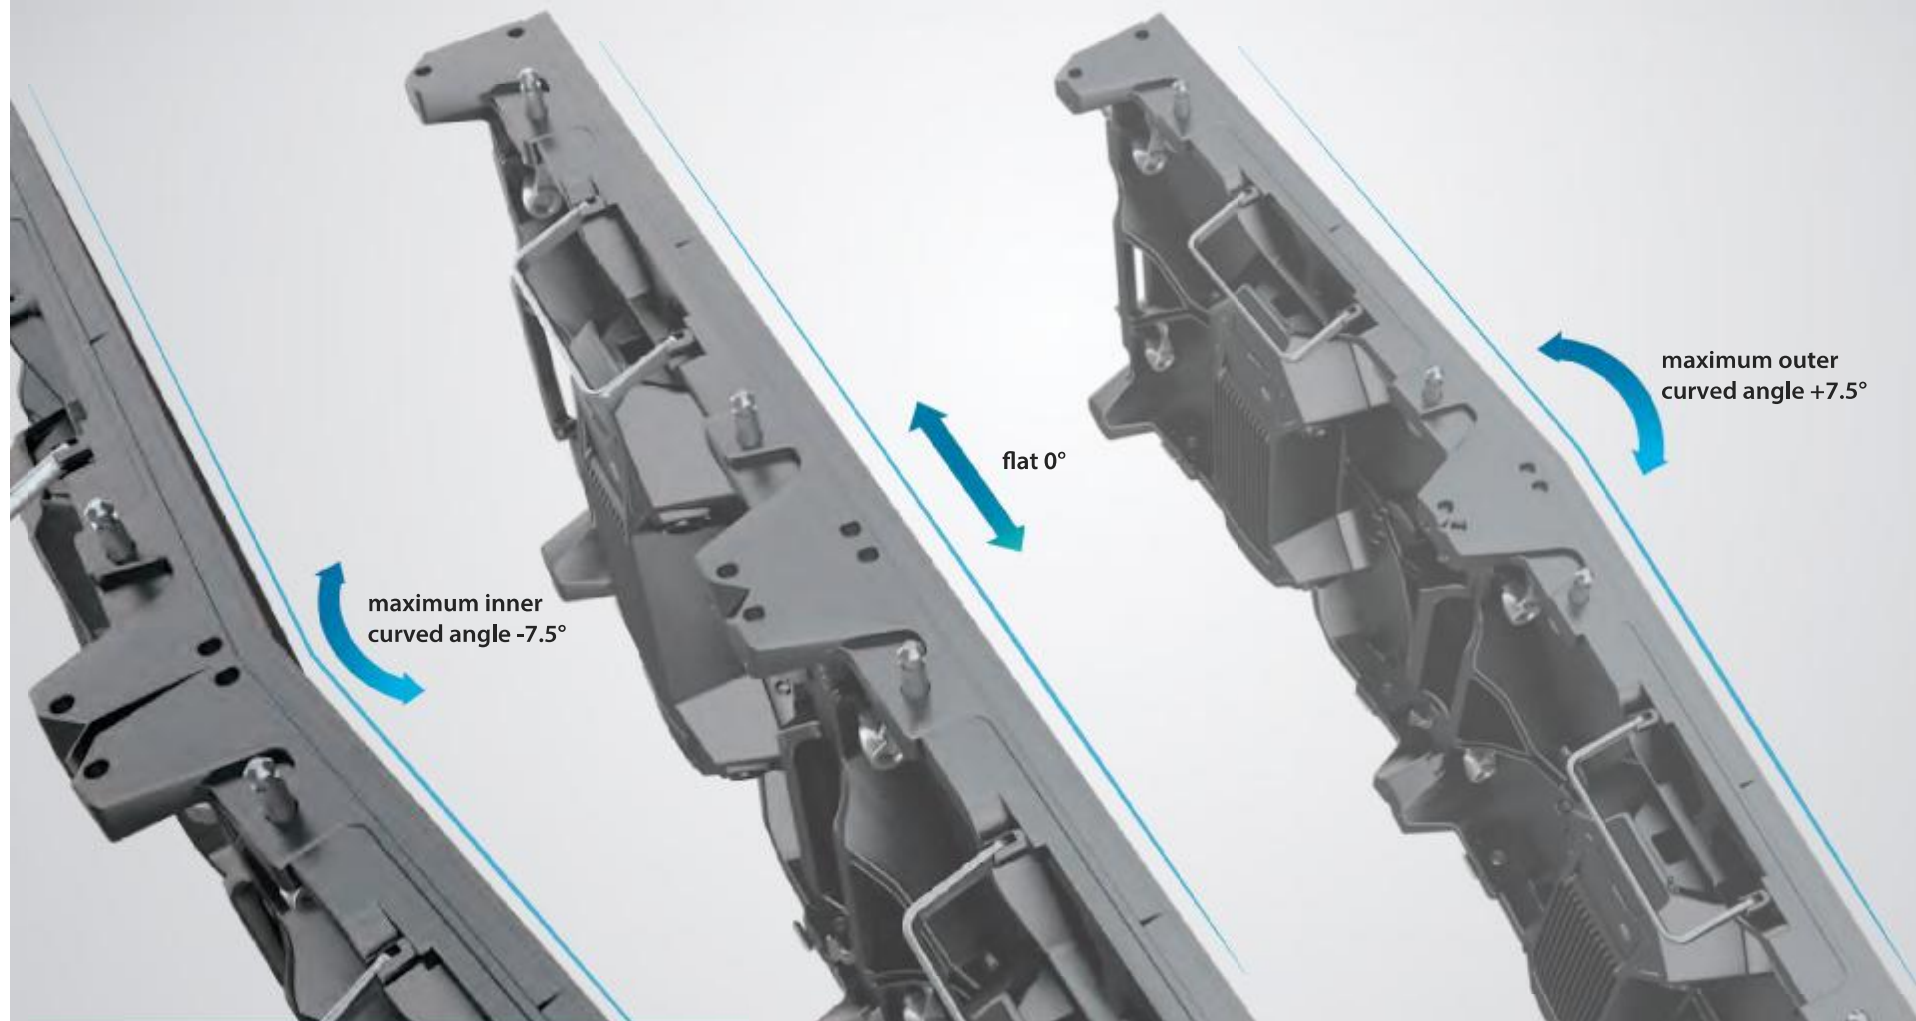
"Wireless Modular Design"

Control box

Module

Aluminum alloy frame

One-person install &
dismantle tool-less design

UNIVIEW

Space between the module to the ground.

Bottom protection design to make sure the module will not directly touch the ground.

UNIVIEW

Parameters-EI

Typology	INDOOR	INDOOR	INDOOR	INDOOR
Pixel Pitch	3.906mm(H*V)	3.125mm(H*V)	2.84mm(H*V)	2.6mm(H*V)
Brightness	≥1200cd/m2			
LED Configuration	1R1G1B			
Power Consumption	210/70			
Refresh Rate	≥3800Hz			
Module Size	250mmX250mm			
Module Resolution	64*64	80*80	88*88	96*96
Cabinet Size	500(W)×500(H)x100mm			
Viewing Angle	120°/120°			
Unit Weight	8.8kg			

T: +86-755-33581900
+86-755-33581901
T: +86-755-29353590
E: sales@univiewled.com
A: Bldg. A, Meicheng Industrial Park, Langjing Road, Dalang Street, Longhua New District, Shenzhen